




Precision accessories MFG.CORP

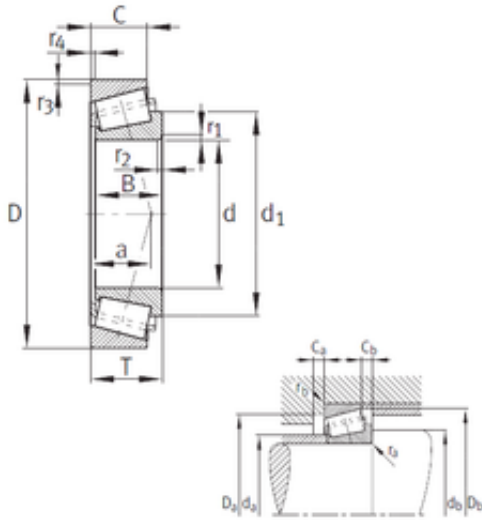

200 mm x 360 mm x 98 mm FAG 32240-A Tapered Roller Bearing Assemblies

Bearing No. 32240-A

| | |
|----------------|----------------|
| Size | 200x360x104 mm |
| Bore Diameter | 200 mm |
| Outer Diameter | 360 mm |
| Width | 104 mm |
| d | 200 mm |
| D | 360 mm |
| T | 104 mm |
| B | 98 mm |
| C | 82 mm |
| a | 83 mm |
| d1 | 274,5 mm |
| r1 min. | 5 mm |
| r2 min. | 4 mm |
| r3 min. | 4 mm |
| r5 min. | 83 mm |
| Ca min. | 11 mm |
| Cb min. | 22 mm |
| da max | 226 mm |
| Da min | 302 mm |
| Da max. | 342 mm |
| db min | 217 mm |
| Db min. | 340 mm |
| ra max. | 5 mm |
| rb max. | 4 mm |
| Weight | 43 Kg |
| | |

32240-A Bearing 2D drawings and 3D CAD models



Precision accessories MFG.CORP

| | |
|-------------------------------|-------------|
| Basic dynamic load rating (C) | 1320 kN |
| Basic static load rating (C0) | 2080 kN |
| Fatigue load limit (Pu) | 225 |
| Reference speed | 1 060 r/min |
| Limiting speed | 1 960 r/min |
| Calculation factor (e) | 0,41 |
| Calculation factor (Y) | 1,48 |