




## Precision accessories MFG.CORP

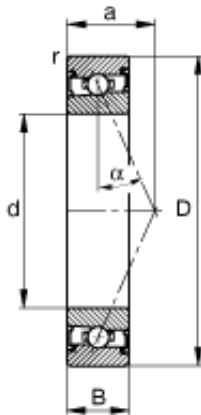

### HSS71921-E-T-P4S FAG precision ball bearings

Bearing No. HSS71921-E-T-P4S

Size	105x145x20 mm
Bore Diameter	105 mm
Outer Diameter	145 mm
Width	20 mm
d	105 mm
D	145 mm
B	20 mm
a	39 mm
$D_a$	138 mm / Tolerance: H12
$d_a$	112 mm / Tolerance: h12
$r_{a \max}$	0,6 mm
$r_{\min}$	1,1 mm
	25 ° / Angle
m	0,87 kg / Weight
$C_r$	27500 N / Dynamic load rating (radial)
$C_{0r}$	23400 N / Static load rating (radial)
$n_{G \text{ Fett}}$	11000 1/min / Limiting speed for grease lubrication
Size	105x145x20 mm
Bore Diameter	105 mm
Outer Diameter	145 mm
Width	20 mm
d	105 mm
D	145 mm
B	20 mm

HSS71921-E-T-P4S Bearing 2D drawings and 3D CAD models



## Precision accessories MFG.CORP

C	20 mm
Angle ( )	25 °
a	39 mm
r min.	1,1 mm
Da	138 mm
ra max.	0,6 mm
da	112 mm
Weight	0,87 Kg
Basic dynamic load rating (C)	28 000 kN
Basic static load rating (C0)	35 500 kN
(Grease) Lubrication Speed	9 000 r/min